

# PRODUCT SPECIFICATION

DATE : 08/22/2006

<b>cosmo</b> ELECTRONICS CORPORATION	Photocoupler : <b>KTLP161L</b>	NO. 61P44005	REV.
		SHEET 1 OF 6	1

## **Mini-flat package Zero Crossing Optoisolators Triac Drive Output ( 800V Volts Peak )**

### ● **Features**

1. Opaque type,mini-flat package.
2. Subminiature type  
(The volume is smaller than that of our conventional DIP type by as far as 30%)
3. Isolation voltage between input and output (Viso:2500Vrms).

### ● **Application :**


1. Solenoid/Valve Controls.
2. Lighting Controls.
3. Static Power Switches.
4. AC Motor Drives.
5. Temperature Controls.
6. E.M. Contactors.
7. AC Motor Staters.
8. Solid State Relays.
9. Programmable controllers.

# PRODUCT SPECIFICATION

DATE : 08/22/2006


<b>cosmo</b> ELECTRONICS CORPORATION	Photocoupler : <b>KTLP161L</b>	NO. 61P44005	REV. 1
		SHEET 2 OF 6	

## ● Outside dimension : Unit ( mm )

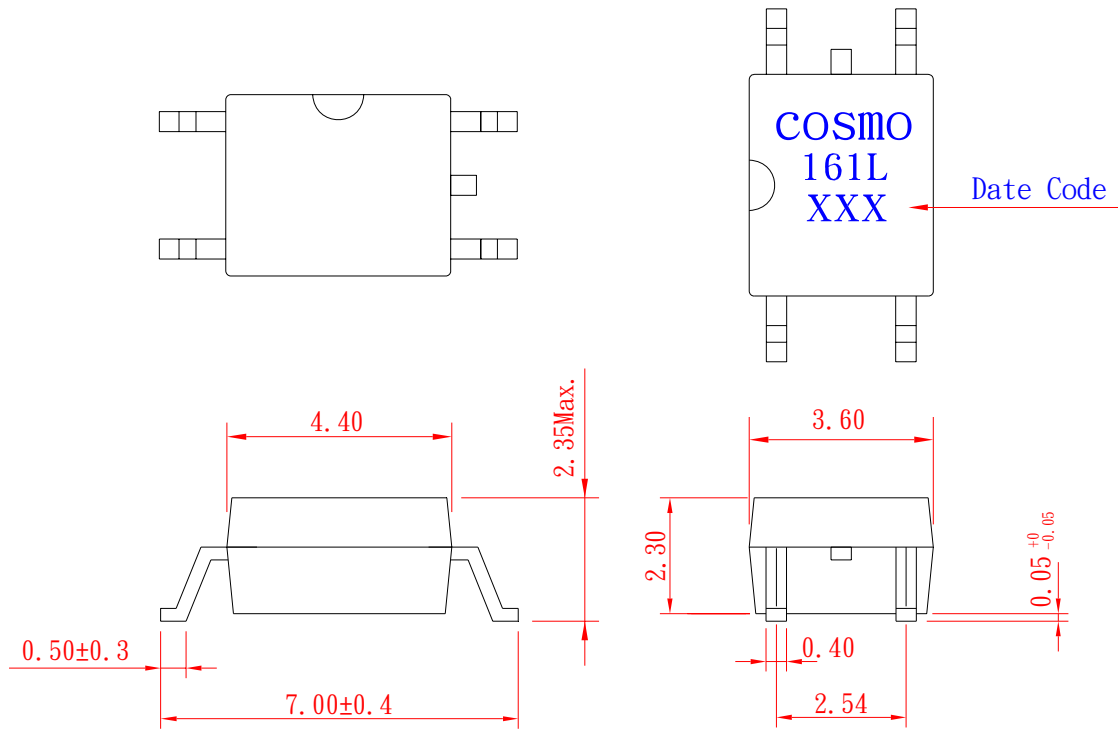

Tolerance : ±0.2mm

## ● Schematic : Top View

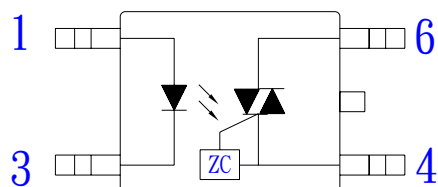

1. Anode
3. Cathode
4. MAIN TERMINAL
6. MAIN TERMINAL

# PRODUCT SPECIFICATION

DATE : 08/22/2006

<b>cosmo</b> ELECTRONICS CORPORATION	Photocoupler : <b>KTLP161L</b>	NO. 61P44005	REV. 1
		SHEET 3 OF 6	

## ● Absolute Maximum Ratings

Parameter		Symbol	Rating	Unit
Input	Forward current	$I_F$	50	mA
	Peak forward current (100us)	$I_{FP}$	1	A
	Reverse voltage	$V_R$	6	V
	Power dissipation	$P_D$	70	mW
Output	Off-State Output Terminal voltage	$V_{DRM}$	800	V
	On-State R.M.S. Current	$I_{T(RMS)}$	70	mA
	Peak Repetitive Surget Current (PW=10ms.DC 10%)	$I_{TSM}$	1	A
	Power dissipation	$P_D$	150	mW
Total power dissipation		$P_{tot}$	200	mW
Isolation voltage 1 minute		$V_{iso}$	2500	$V_{rms}$
Operating temperature		$T_{opr}$	-40 to +100	°C
Storage temperature		$T_{stg}$	-50 to +125	°C
Soldering temperature 10 second		$T_{sol}$	260	°C

## ● Electro-optical Characteristics


Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input	Forward voltage	$V_F$	$I_F = 10mA$	-	1.2	1.4	V
	Reverse current	$I_R$	$V_R = 6V$	-	-	10	$\mu A$
Output	Peak Blocking Current	$I_{DRM}$	$V_{DRM} = \text{Rated}$	-	-	1.0	$\mu A$
	On-State Voltage	$V_{TM}$	$I_{TM} = 70mA$	-	1.6	2.8	V
Transfer characteristics	Holding Current	$I_H$		-	1.0		mA
	Critical rate of rise of Off-state voltage	$dV/dt$	$V_{DRM} = (1/\sqrt{2}) \cdot \text{Rated}$	600	-	-	$V/\mu s$
	Isolation resistance	$R_{iso}$	DC500V	$5 \times 10^{10}$	$10^{11}$	-	$\Omega$
	Minimum trigger current	$I_{FT}$	Main Terminal Voltage=3V	-	5	10	mA
	Inhibit voltage ( MT1-MT2 Voltage above which device not trigger )	$V_{INH}$	$I_F = \text{Rated } I_{FT}$	-	-	50	V
	Leakage in Inhibited State	$I_{DRM2}$	$I_F = \text{Rated } I_{FT}, \text{ Rated } V_{DRM}, \text{ Off State}$	-	500	1000	$\mu A$

# PRODUCT SPECIFICATION


DATE : 08/22/2006

<b>cosmo</b> ELECTRONICS CORPORATION	Photocoupler :	NO. 61P44005	REV. 1
	<b>KTLP161L</b>	SHEET 4 OF 6	


Forward Current vs. Ambient Temperature

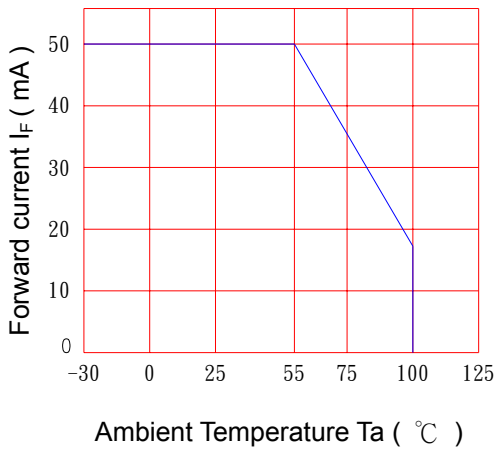


Diode Power Dissipation vs. Ambient Temperature

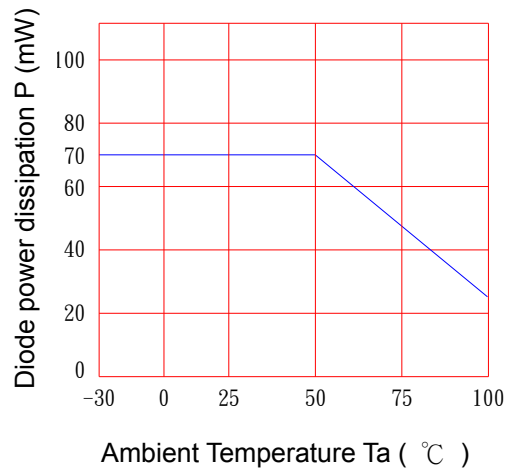


On-State R.M.S. Current vs. Ambient Temperature

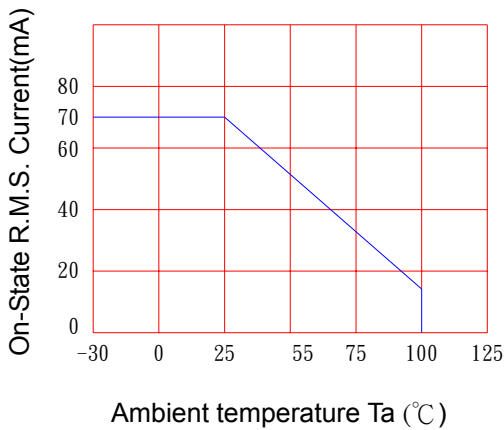


Total Power Dissipation vs. Ambient Temperature

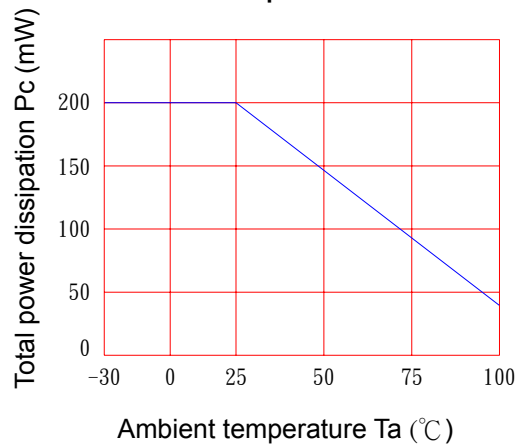

Peak Forward Current vs. Duty Ratio

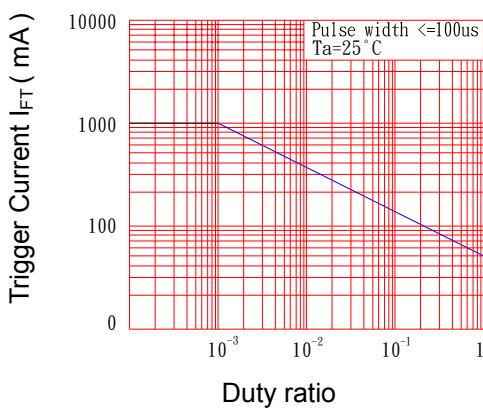

Forward Current vs. Forward Voltage

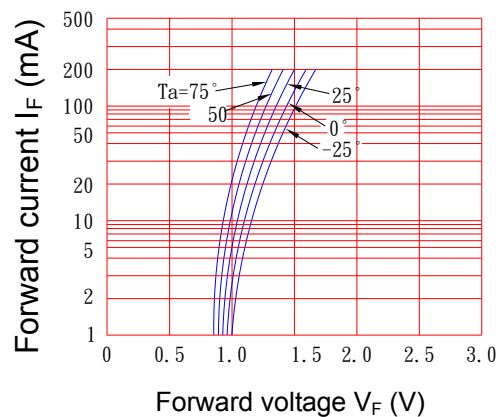


# PRODUCT SPECIFICATION


DATE : 08/22/2006

<b>cosmo</b> ELECTRONICS CORPORATION	Photocoupler :	NO. 61P44005	REV. 1
	<b>KTLP161L</b>	SHEET 5 OF 6	


On-State Characteristics

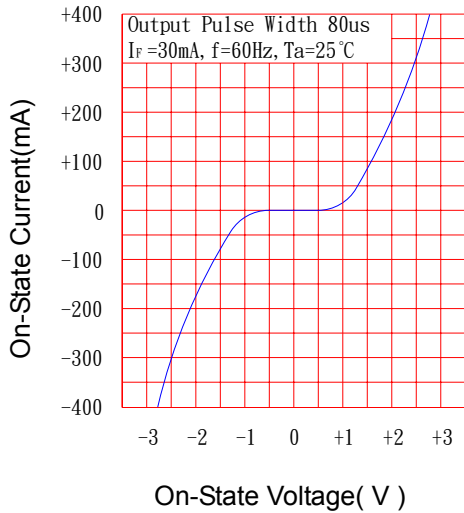


Leakage with LED off vs. Ambient Temperature

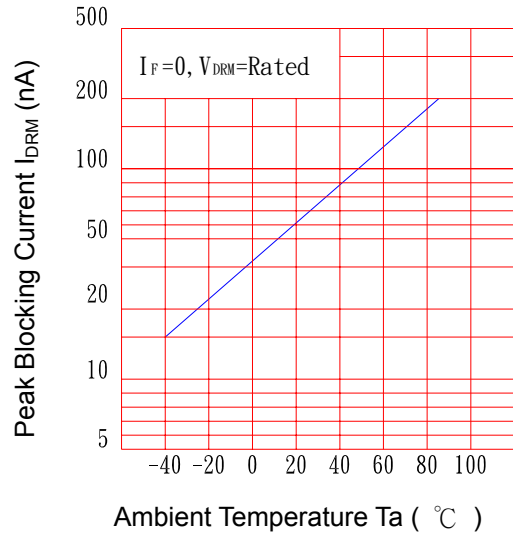


Trigger Current vs. Ambient Temperature

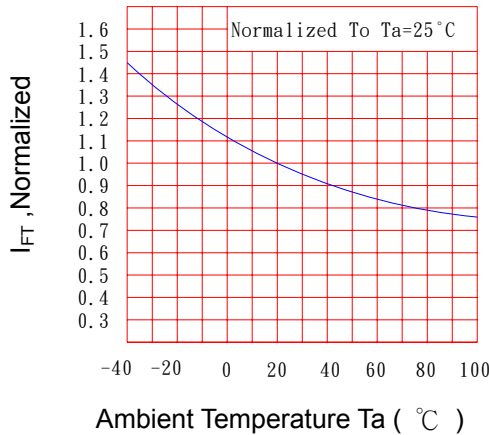

Inhibit Voltage vs. Ambient Temperature

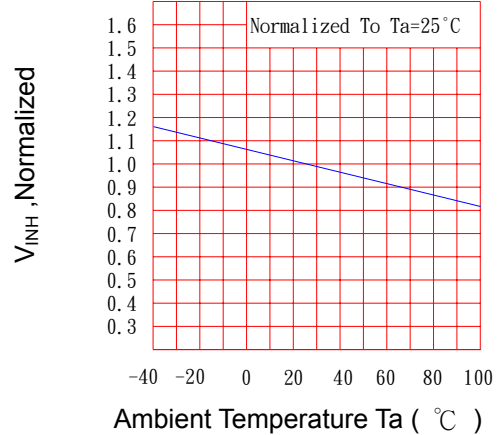

IDRM2 ,Leakage in Inhibit vs. Ambient Temperature

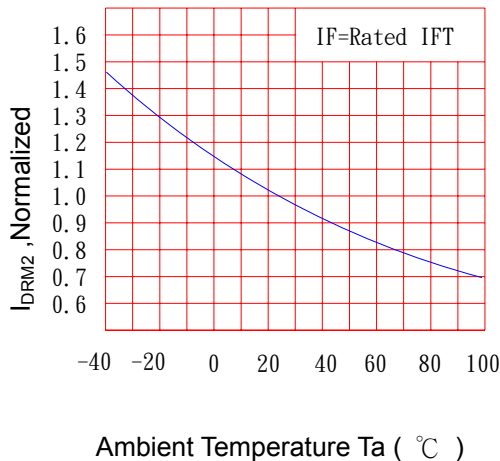

# PRODUCT SPECIFICATION

DATE : 08/22/2006

<b>cosmo</b> ELECTRONICS CORPORATION	Photocoupler : <b>KTLP161L</b>	NO. 61P44005	REV.
		SHEET 6 OF 6	1

## ● NOTICE

The information contained in this document is intended to be a general product description and is subject to change without notice. Please contact cosmo in order to obtain the latest device data sheets before using any cosmo device. cosmo does not assume any responsibility for use of any circuitry described. No circuit patent licenses are implied. This publication is the property of cosmo. No part of this publication may be reproduced or copied in any form or by any means, or transferred to any third party without the prior written consent of cosmo Electronics Corporation.

The devices listed in this document are designed for general applications only in electronic equipment. No devices shall be deployed which require higher level of reliability such as :

- Medical and other life support equipments.
- Space application.
- Telecommunication equipment ( trunk lines ).
- Nuclear power control equipment.

Unless it received prior written approval from cosmo.

cosmo takes no responsibility for damages arise form the improper usage of our device. Please contact cosmo for further information regarding the above notices.